



M410

LABEL PRINTER


1" (25.4mm) wide labels
One tough labeller

YOUR TOUGHEST LABELLING JOBS JUST GOT A LOT EASIER

Specifically engineered for premium 1" (25.4mm) printing, the M410 Label Printer is an everyday workhorse for contractors, DataCom and electrical professionals. Create and print labels faster with its intuitive QWERTY keypad and programmed pre-set label options for wire marking, flagging and patch panel ID.

THE M410 LABEL PRINTER

Power through whatever the job throws at you




1" (25.4mm) wide labels



Super intuitive keypad



Flexibility for any jobsite

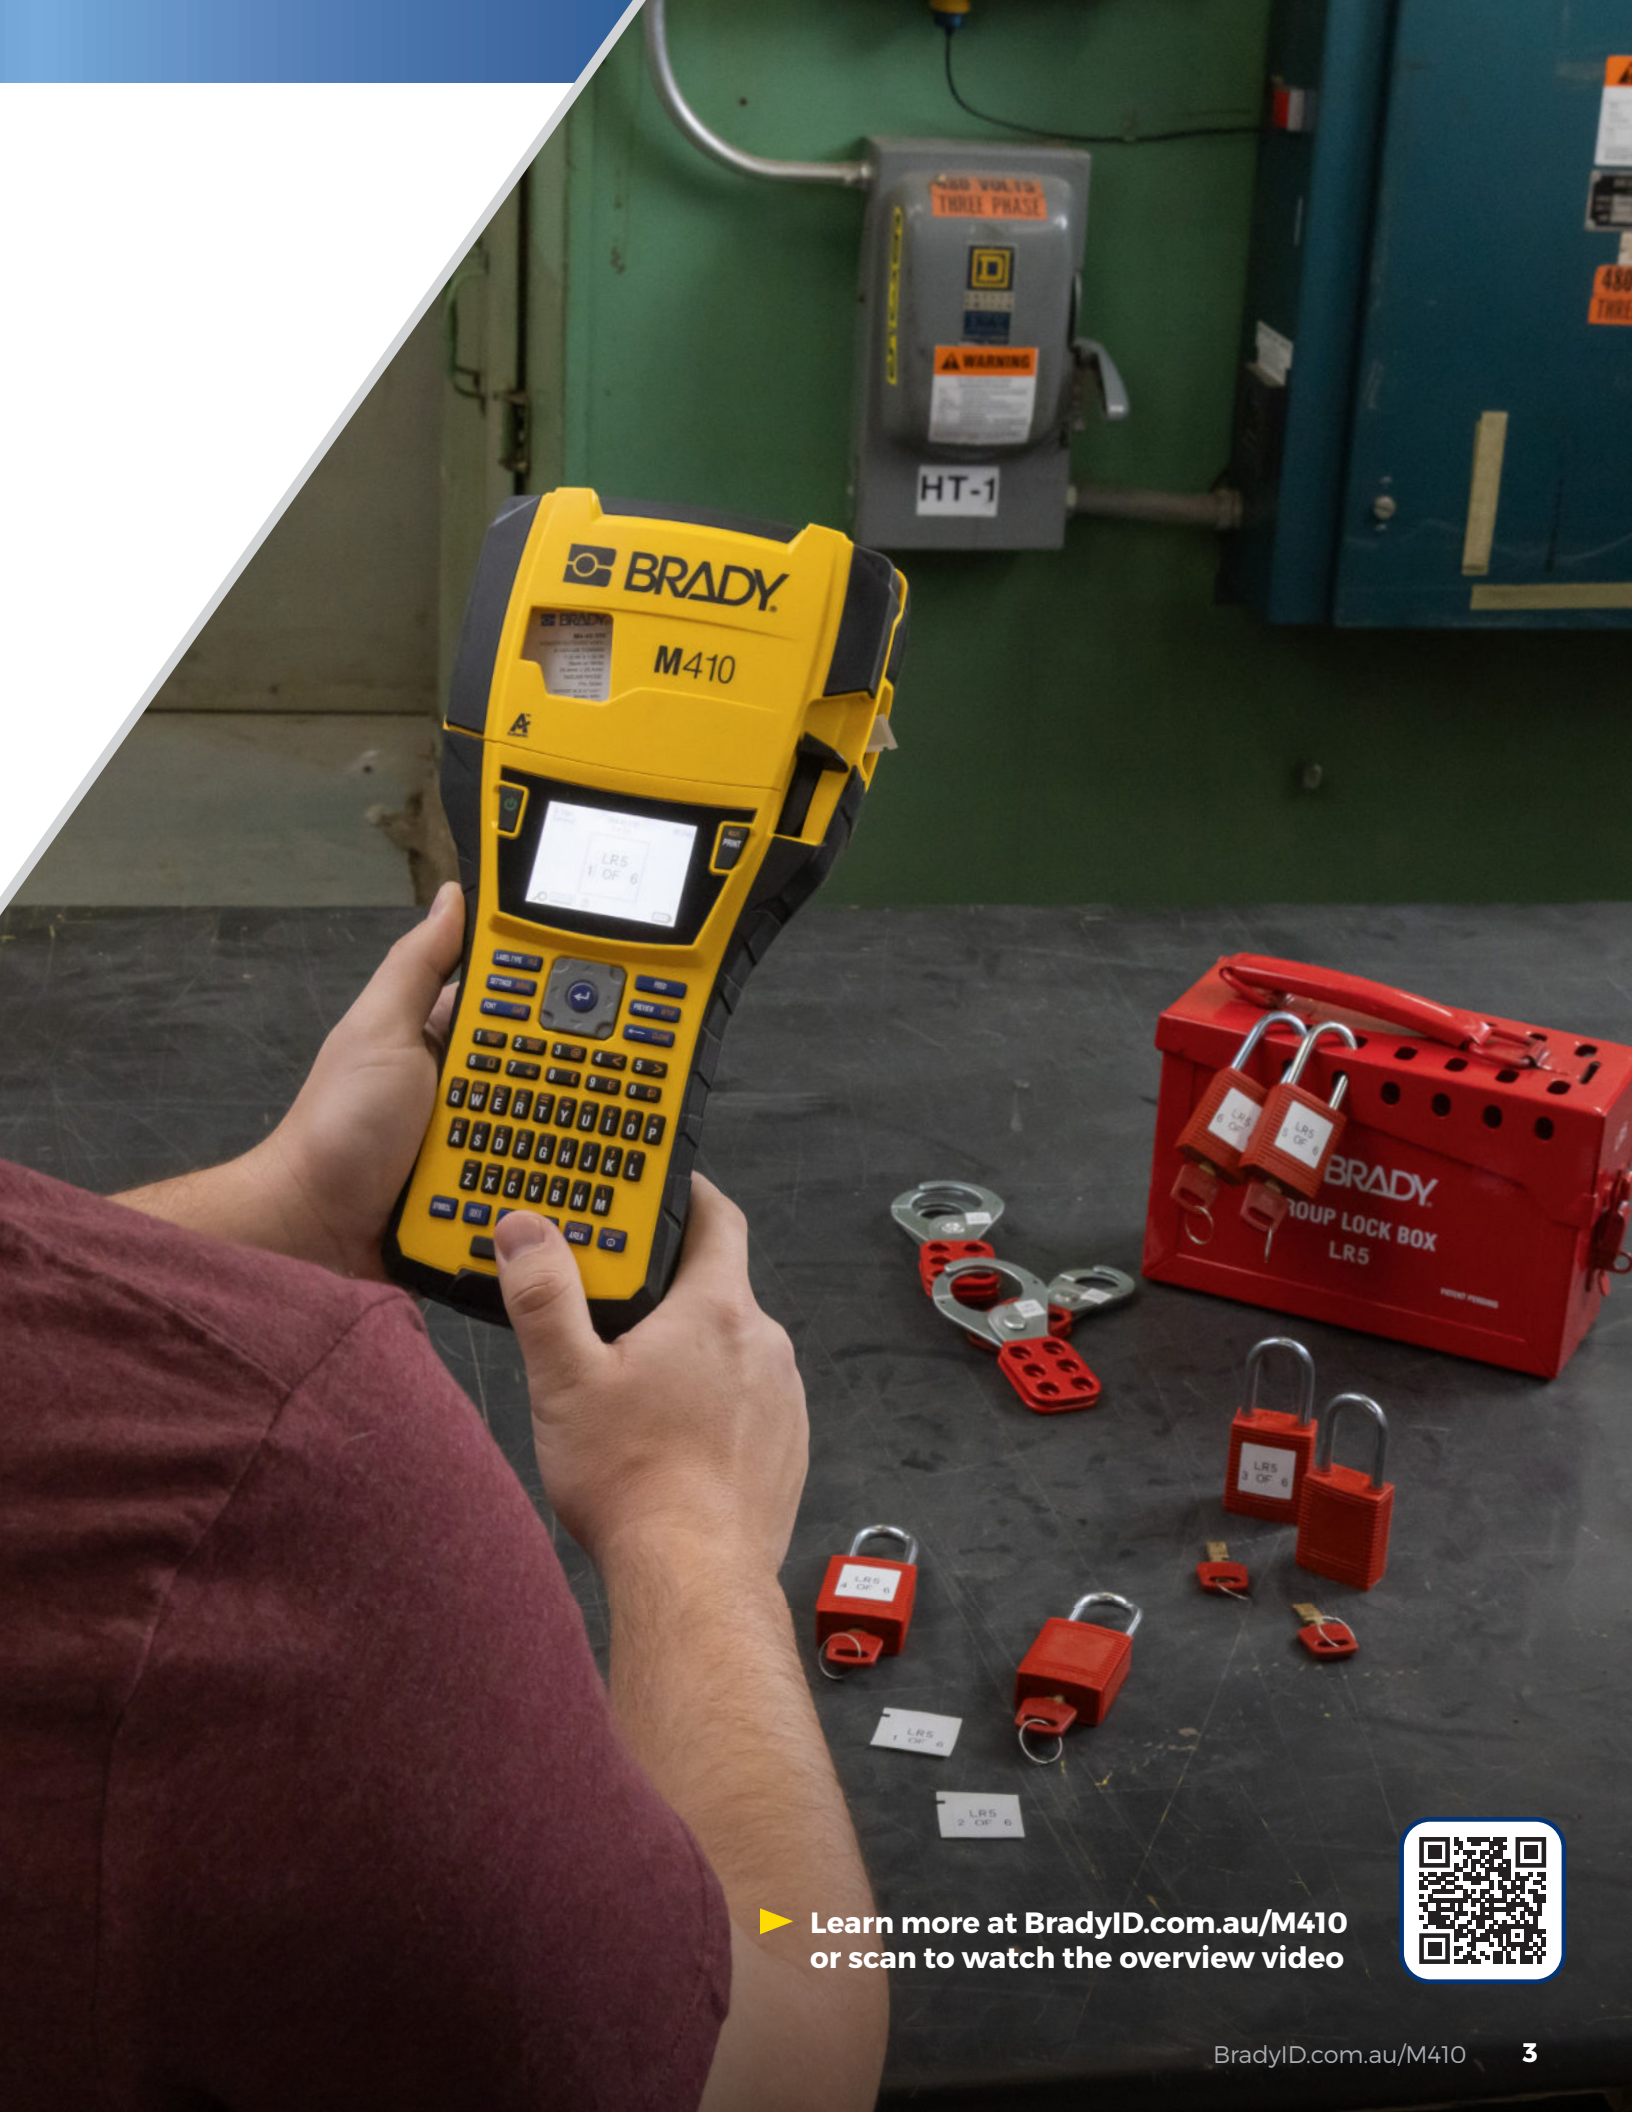

BRADY

M410

LR5
1 OF 6



▶ Learn more at BradyID.com.au/M410 or scan to watch the overview video



DESIGNED TO HANDLE WHATEVER YOUR WORK DEMANDS

Power through whatever the job throws at you with the M410. From easy-to-use onboard menu options to auto label setup with edge-to-edge printing, it's jobsite ready to take on your most demanding work. Ultra durable, it withstands everyday drops up to 4' (1.2m), and has time-saving shortcuts so you can do more in less time. Create labels with the intuitive keypad, customise design templates and choose from more material options. With more ways to get work done, the M410 outperforms your every expectation.

Withstands 4' (1.2m) drops

Auto-formatting of text to label size

Intuitive QWERTY Keypad





A Upload and go

Import data through the USB port



B Faster changeovers

Simple all-in-one, drop-in cartridges



C Fit for many applications

Pre-sized and continuous labels
(0.25" (6.35 mm) to 1" (25.4mm) width)



D Label design guides

Reduce errors and save time with intuitive guides



M410 accessory
Utility Hook

More time-saving tools to get the job done. **See page 19**

SIMPLY INTUITIVE SUPER TOUGH

More materials, more sizes and more applications mean more ways to get work done. Take on your toughest jobs with the M410.

Rugged. Reliable. Ready for your work.



Durable, industrial design – withstands 4' (1.2m) drops



Edge-to-edge printing – more room to fit the data you need with no label waste



Up to 1" (25.4mm) wide labels – ready to wrap, sleeve, tag and flag

Flexible data entry options that work with you



Connect to Brady Workstation through USB 2.0 port (Type A and B)



Work at an accelerated pace with 440 onboard symbols and on-board label design guides



Design and print labels using the intuitive printer keypad or desktop software

More data entry options to get the job done

Create identification the easy way with the M410 printer + software system. With it, you can design and print labels seamlessly – wherever and whenever you need them.



Barcodes and graphics



Label sequencing



Microsoft Excel data imports

Brady Workstation software:

- ▶ 20+ barcode types
- ▶ 85+ fonts
- ▶ 1,400+ symbols
- ▶ Label saving and sharing
- ▶ Accurate print preview
- ▶ Real-time printer status

Work the way your work demands



PRINTER KEYPAD



DESKTOP SOFTWARE



ON-BOARD LABEL DESIGN GUIDES

THE RIGHT LABEL

from the right partner

Data with durability

The M410 helps you power through work faster with 110+ hassle-free drop-in cartridges designed to handle whatever the job demands. Simple and intuitive, the M410 will keep pace as you wrap, sleeve, tag and flag your way through your most challenging work.

Your time- and cost-saving benefits include:



**DECREASED
SETUP TIME**



**FEWER
LABEL ERRORS**




**COMPLIANT
LABEL CREATION**



**REDUCED
MATERIAL WASTE**

Get the job done right on any jobsite

Optimise your performance with Brady materials

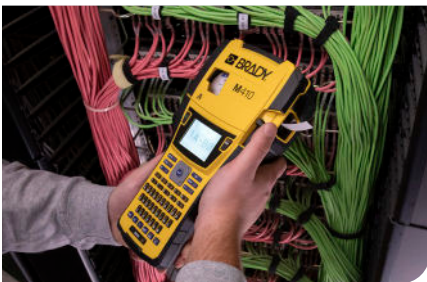

DATAKOM & TELECOM

- ▶ Keep compliant with protective self-lams and flags
- ▶ Convey more information printing edge to edge
- ▶ Communicate better with patch panel and faceplate ID



WIRE & CABLE, ELECTRICAL

- ▶ Use 1 tool for multiple on-site applications
- ▶ Create pre-set label options
- ▶ Wrap, sleeve, tag and flag through challenging work



GENERAL IDENTIFICATION

- ▶ Do more with a surplus of sizes, colours and materials
- ▶ Easily locate equipment, assets and batches
- ▶ Take on tough jobsites with purpose-built materials



Enjoy a more premium labelling experience with optimised Brady Authentic materials

Authentic materials work seamlessly with Brady printers to produce enhanced performance and reliability you just don't get with materials from the "other guys." Get authentic. Get better with Brady.

Hundreds of purpose-built materials. The highly specialised labels you need.

Brady has you covered with the widest range of colours, finishes and targeted applications in the industry.




All-Weather

Get extra durability outdoors and in tough, industrial workspaces. Choose labels that are reflective or resistant to UV light, chemicals, salt spray and cleaners.



Flags

Create easy-to-read, permanent identification for wires and cables or to track assets in labs and manufacturing environments.



Heat Shrink

Choose industrial grade, heat-shrinkable sleeve labels for long-lasting wire and cable identification. Built to Naval Air Systems Command (NAVAIR) and industry-specific standards.



Laboratory

Ensure lab samples remain legible, scannable and trackable in every extreme process: cryogenic, staining, solvents and processing fluids.



Metallised

Use professional metallic-looking labels for rating plates, name plates and general identification of industrial products.



Multi-Purpose

Rely on white or clear labels for just about any industrial application that involves high or low temperatures, harsh environments or regulatory specifications. Choose from various adhesion types: standard, aggressive adhesive, ultra-aggressive adhesive or repositionable.



Paper

Use low-cost, smear-resistant paper labels for identifying just about anything in labs or industrial settings.



Tags and Inserts

Get added durability from tags that are engineered for extreme temperatures and abrasion. Use them to wrap wire or cable bundles in patch panels and outlets.



Unique Material

Get a grip on your wire and cable identification – Brady and VELCRO® Brand have partnered to bring you BradyGrip® Print-on Hook Material, an exclusive print-and-place material that can be easily applied, repositioned or removed.



Wrap Around

Protect important wire and cable ID using labels with a clear laminating barrier. The clear vinyl resists abrasions and chemicals while keeping the white printable area intact.

Enjoy a more premium labelling experience with optimised Brady Authentic materials



Authentic materials work seamlessly with Brady printers to produce enhanced performance and reliability you just don't get with materials from the "other guys." Get authentic. Get better with Brady.



All-Weather

Get extra durability outdoors and in tough, industrial workspaces. Choose labels that are reflective or resistant to UV light, chemicals, salt spray and cleaners.



All-Weather Vinyl Labels

Make labels that withstand up to 10 years of outdoor abuse with this low-shrink vinyl label material (B-595).

Temp. range: -40° F to 180° F (-40° C to 82° C). UL recognised




Figure 29




Figure 33

Part No.	Catalog #	B#	Material	Colour	Finish	Label width A inch (mm)	Label height B inch (mm)	Labels per roll	Figure
176804	M4-11-595	B-595	Vinyl	Black on White	Gloss	0.750 (19.1)	0.500 (12.7)	360	Fig 29
176805	M4-17-595	B-595	Vinyl	Black on White	Gloss	1.000 (25.4)	0.500 (12.7)	360	Fig 29
176806	M4-49-595	B-595	Vinyl	Black on White	Gloss	1.000 (25.4)	1.000 (25.4)	160	Fig 29
176803	M4-7-595	B-595	Vinyl	Black on White	Gloss	0.500 (12.7)	0.500 (12.7)	280	Fig 29
177010	M4-22-595	B-595	Vinyl	Black on White	Gloss	3.000 (76.2)	1.000 (25.4)	100	Fig 29
170841	M4C-1000-595-BK-WT	B-595	Vinyl	White on Black	Gloss	1.000 (25.4)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170836	M4C-1000-595-BL-WT	B-595	Vinyl	White on Blue	Gloss	1.000 (25.4)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170838	M4C-1000-595-CL-BK	B-595	Vinyl	Black on Clear	Gloss	1.000 (25.4)	20 ft (6.1 m)	1 roll (cont.)	Fig 33
170842	M4C-1000-595-CL-WT	B-595	Vinyl	White on Clear	Gloss	1.000 (25.4)	20 ft (6.1 m)	1 roll (cont.)	Fig 33
170839	M4C-1000-595-GN-WT	B-595	Vinyl	White on Green	Gloss	1.000 (25.4)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170835	M4C-1000-595-OR-BK	B-595	Vinyl	Black on Orange	Gloss	1.000 (25.4)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170837	M4C-1000-595-RD-WT	B-595	Vinyl	White on Red	Gloss	1.000 (25.4)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170833	M4C-1000-595-WT-BK	B-595	Vinyl	Black on White	Gloss	1.000 (25.4)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170840	M4C-1000-595-WT-RD	B-595	Vinyl	Red on White	Gloss	1.000 (25.4)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170834	M4C-1000-595-YL-BK	B-595	Vinyl	Black on Yellow	Gloss	1.000 (25.4)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170949	M4C-250-595-WT-BK	B-595	Vinyl	Black on White	Gloss	0.250 (6.4)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170950	M4C-250-595-YL-BK	B-595	Vinyl	Black on Yellow	Gloss	0.250 (6.4)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170845	M4C-375-595-RD-WT	B-595	Vinyl	White on Red	Gloss	0.375 (9.5)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170843	M4C-375-595-WT-BK	B-595	Vinyl	Black on White	Gloss	0.375 (9.5)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170844	M4C-375-595-YL-BK	B-595	Vinyl	Black on Yellow	Gloss	0.375 (9.5)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170821	M4C-500-595-BK-WT	B-595	Vinyl	White on Black	Gloss	0.500 (12.7)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170813	M4C-500-595-BL-WT	B-595	Vinyl	White on Blue	Gloss	0.500 (12.7)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170814	M4C-500-595-CL-BK	B-595	Vinyl	Black on Clear	Gloss	0.500 (12.7)	20 ft (6.1 m)	1 roll (cont.)	Fig 33
170822	M4C-500-595-CL-WT	B-595	Vinyl	White on Clear	Gloss	0.500 (12.7)	20 ft (6.1 m)	1 roll (cont.)	Fig 33
170815	M4C-500-595-GN-WT	B-595	Vinyl	White on Green	Gloss	0.500 (12.7)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170816	M4C-500-595-OR-BK	B-595	Vinyl	Black on Orange	Gloss	0.500 (12.7)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170817	M4C-500-595-RD-WT	B-595	Vinyl	White on Red	Gloss	0.500 (12.7)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170818	M4C-500-595-WT-BK	B-595	Vinyl	Black on White	Gloss	0.500 (12.7)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170819	M4C-500-595-WT-RD	B-595	Vinyl	Red on White	Gloss	0.500 (12.7)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170820	M4C-500-595-YL-BK	B-595	Vinyl	Black on Yellow	Gloss	0.500 (12.7)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170823	M4C-750-595-BK-WT	B-595	Vinyl	White on Black	Gloss	0.750 (19.1)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170824	M4C-750-595-BL-WT	B-595	Vinyl	White on Blue	Gloss	0.750 (19.1)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170825	M4C-750-595-CL-BK	B-595	Vinyl	Black on Clear	Gloss	0.750 (19.1)	20 ft (6.1 m)	1 roll (cont.)	Fig 33
170826	M4C-750-595-CL-WT	B-595	Vinyl	White on Clear	Gloss	0.750 (19.1)	20 ft (6.1 m)	1 roll (cont.)	Fig 33
170827	M4C-750-595-GN-WT	B-595	Vinyl	White on Green	Gloss	0.750 (19.1)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170828	M4C-750-595-OR-BK	B-595	Vinyl	Black on Orange	Gloss	0.750 (19.1)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170829	M4C-750-595-RD-WT	B-595	Vinyl	White on Red	Gloss	0.750 (19.1)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170830	M4C-750-595-WT-BK	B-595	Vinyl	Black on White	Gloss	0.750 (19.1)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170831	M4C-750-595-WT-RD	B-595	Vinyl	Red on White	Gloss	0.750 (19.1)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170832	M4C-750-595-YL-BK	B-595	Vinyl	Black on Yellow	Gloss	0.750 (19.1)	25 ft (7.6 m)	1 roll (cont.)	Fig 33



Retro Reflective All-Weather Labels

Increase safety and visibility with the B-584 highly-reflective label material. Print labels almost anywhere high visibility is needed.

Temp. range: -40° F to 158° F (-40° C to 70° C).
Meets Federal Spec L-S-300 for reflectivity.




Figure 33

Part No.	Catalog #	B#	Material	Colour	Finish	Label width A inch (mm)	Label height B inch (mm)	Labels per roll	Figure
170809	M4C-500-584	B-584	Plastic	Black on White	Gloss	0.500 (12.7)	20 (6.1)	1 roll (cont.)	Fig 33
170810	M4C-500-584-YL	B-584	Plastic	Black on Yellow	Gloss	0.500 (12.7)	20 (6.1)	1 roll (cont.)	Fig 33
170811	M4C-750-584	B-584	Plastic	Black on White	Gloss	0.750 (19.1)	20 (6.1)	1 roll (cont.)	Fig 33
170812	M4C-750-584-YL	B-584	Plastic	Black on Yellow	Gloss	0.750 (19.1)	20 (6.1)	1 roll (cont.)	Fig 33

Flags

Create easy-to-read, permanent identification for wires and cables or to track assets in labs and manufacturing environments.



T-Flag or P-Flag Matte Polypropylene Labels

Easily flag cables and wires for maximum readability with this thermal transfer printable polypropylene flag label material (B-425).





Figure 78

Part No.	Catalog #	B#	Material	Colour	Finish	Label width A inch (mm)	Label height B inch (mm)	Labels per roll	Figure
177005	M4-1-425-FP	B-425	Polypropylene	Black on White	Matte	0.788 (20.0)	1.180 (29.9)	120	Fig 78



QuickFlag™ Ultra-Aggressive Adhesive Multi-Purpose Polyester Labels

Quickly flag wires and cables with the B-483 QuickFlag™ material, featuring a tapered design to prevent mismatched edges and reduce wasted labels.




Figure 88c

Part No.	Catalog #	B#	Material	Colour	Finish	Label width A inch (mm)	Label height B inch (mm)	Labels per roll	Figure
170965	M4-214-483	B-483	Polyester	Black on White	Gloss	1.000 (25.4)	1.000 (25.4)	140	Fig 88c

Heat Shrink

Choose industrial grade, heat-shrinkable sleeve labels for long lasting wire and cable identification. Built to Naval Air Systems Command (NAVAIR) and industry-specific standards.



PermaSleeve® Heat-Shrink Labels

Permanently mark wires with the durable PermaSleeve® PS heat-shrink polyolefin sleeve label material (B-342).

Temp. range: -67° F to 275° F (-55° C to 130° C).
RoHS compliant and UL recognised.




Figure 58

Part No.	Catalog #	B#	Material	Colour	Finish	Approx Wire Gauge	Diameter as supplied B inch (mm)	Recovered diameter inch (mm)	Label width A inch (mm)	Labels per roll	Figure
170721	M4-125-075-342	B-342	Polyolefin	Black on White	Matte	22 AWG - 16 AWG	0.125 (3.2)	0.047 (1.2)	0.235 (5.97)	80	Fig 58
170719	M4-187-075-342	B-342	Polyolefin	Black on White	Matte	20 AWG - 10 AWG	0.187 (4.8)	0.062 (1.6)	0.335 (8.51)	80	Fig 58
170720	M4-250-075-342	B-342	Polyolefin	Black on White	Matte	16 AWG - 8 AWG	0.250 (6.4)	0.093 (2.4)	0.439 (11.2)	80	Fig 58
170722	M4-375-075-342	B-342	Polyolefin	Black on White	Matte	12 AWG - 4 AWG	0.375 (9.5)	0.125 (3.2)	0.645 (16.4)	80	Fig 58
170712	M4C-125-342	B-342	Polyolefin	Black on White	Matte	22 AWG - 16 AWG	0.125 (3.2)	0.047 (1.2)	0.235 (5.9)	1 roll (cont.)	Fig 58
170713	M4C-125-342-YL	B-342	Polyolefin	Black on Yellow	Matte	22 AWG - 16 AWG	0.125 (3.2)	0.047 (1.2)	0.235 (5.9)	1 roll (cont.)	Fig 58
170714	M4C-187-342	B-342	Polyolefin	Black on White	Matte	20 AWG - 10 AWG	0.187 (4.8)	0.062 (1.6)	0.335 (8.5)	1 roll (cont.)	Fig 58
170715	M4C-187-342-YL	B-342	Polyolefin	Black on Yellow	Matte	20 AWG - 10 AWG	0.187 (4.8)	0.062 (1.6)	0.335 (8.5)	1 roll (cont.)	Fig 58
170716	M4C-250-342	B-342	Polyolefin	Black on White	Matte	16 AWG - 8 AWG	0.250 (6.4)	0.093 (2.4)	0.439 (11.2)	1 roll (cont.)	Fig 58
170717	M4C-250-342-YL	B-342	Polyolefin	Black on Yellow	Matte	16 AWG - 8 AWG	0.250 (6.4)	0.093 (2.4)	0.439 (11.2)	1 roll (cont.)	Fig 58
170718	M4C-375-342	B-342	Polyolefin	Black on White	Matte	12 AWG - 4 AWG	0.375 (9.5)	0.125 (3.2)	0.645 (16.4)	1 roll (cont.)	Fig 58



PermaSleeve® Low Smoke Zero Halogen Heat-Shrink Labels

Permanently mark wires and cables with the low-smoke, halogen-free B-7641 polyolefin label material. Pre-sized to fit most wire and cable assemblies.

Temp. range: -22° F to 221° F (-30° C to 105° C).




Figure 58

Part No.	Catalog #	B#	Material	Colour	Finish	Approx Wire Gauge	Diameter as supplied B inch (mm)	Recovered diameter inch (mm)	Label width A inch (mm)	Labels per roll	Figure
170848	M4C-125-7641	B-7641	Polyolefin	Black on White	Matte	20 AWG - 16 AWG	0.125 (3.2)	0.063 (1.6)	0.235 (5.9)	1 roll (cont.)	Fig 58
170849	M4C-125-7641-YL	B-7641	Polyolefin	Black on Yellow	Matte	20 AWG - 16 AWG	0.125 (3.2)	0.063 (1.6)	0.235 (5.9)	1 roll (cont.)	Fig 58
170951	M4C-187-7641	B-7641	Polyolefin	Black on White	Matte	16 AWG - 10 AWG	0.187 (4.6)	0.094 (2.4)	0.335 (8.5)	1 roll (cont.)	Fig 58
170952	M4C-187-7641-YL	B-7641	Polyolefin	Black on Yellow	Matte	16 AWG - 10 AWG	0.187 (4.6)	0.094 (2.4)	0.335 (8.5)	1 roll (cont.)	Fig 58
170953	M4C-250-7641	B-7641	Polyolefin	Black on White	Matte	12 AWG - 8 AWG	0.250 (6.4)	0.125 (3.2)	0.439 (11.2)	1 roll (cont.)	Fig 58
170954	M4C-250-7641-YL	B-7641	Polyolefin	Black on Yellow	Matte	12 AWG - 8 AWG	0.250 (6.4)	0.125 (3.2)	0.439 (11.2)	1 roll (cont.)	Fig 58
170955	M4C-375-7641	B-7641	Polyolefin	Black on White	Matte	8 AWG - 4 AWG	0.375 (9.5)	0.189 (4.8)	0.645 (16.4)	1 roll (cont.)	Fig 58
170956	M4C-375-7641-YL	B-7641	Polyolefin	Black on Yellow	Matte	8 AWG - 4 AWG	0.375 (9.5)	0.189 (4.8)	0.645 (16.4)	1 roll (cont.)	Fig 58

Laboratory

Ensure lab samples remain legible, scannable and trackable in every extreme process: cryogenic, staining, solvents and processing fluids.



Chemical and Temperature Resistant Polypropylene Labels

Mark dry, room temperature specimen containers with this economical matte white polypropylene label material (B-7425).

Temp. range: -320° F to 248° F (-195° C to 120° C).




Figure 33

Part No.	Catalog #	B#	Material	Colour	Finish	Label Width A inch (mm)	Label Height B inch (mm)	Labels per Roll	Figure
177012	M4C-1000-7425	B-7425	Polypropylene	Black on White	Matte	1.000 (25.4)	25 (7.6)	Fig 33	33



FreezerBondz™ Cryogenic Matte Polyester Labels

Securely mark flat lab surfaces in liquid nitrogen or freezer environments with the durable B-490 polyester label material.

Temp. range: -320° F to 320° F (-195° C to 160° C).
RoHS compliant.





Figure 29

Part No.	Catalog #	B#	Material	Colour	Finish	Label width A inch (mm)	Label height B inch (mm)	Labels per roll	Figure
170775	M4-124-490	B-490	Polyester	Black on White	Matte	0.500 (12.7)	1.650 (41.9)	180	Fig 29
170776	M4-126-490	B-490	Polyester	Black on White	Matte	1.800 (45.7)	0.600 (15.2)	180	Fig 29



FreezerBondz™ Ultra-Thin Cryogenic Polyester Labels

Label curved frozen lab surfaces including tubes, vials and cryocanes with the ultra-thin B-492 polyester label material.

Temp. range: -320°F to 266°F (-195°C to 130°C).




Figure 24

Figure 26

Figure 29

Figure 33

Part No.	Catalog #	B#	Material	Colour	Finish	Label width A inch (mm)	Label height B inch (mm)	Secondary label C inch (mm)	Labels per roll	Figure
170779	M4-130-492	B-492	Polyester	Black on White	Matte	0.375 (9.5)	0.825 (20.9)	-	220	Fig 29
170780	M4-131-492	B-492	Polyester	Black on White	Matte	0.500 (12.7)	1.000 (25.4)	-	180	Fig 29
170778	M4-82-492	B-492	Polyester	Black on White	Matte	0.375 (9.5)	-	-	240	Fig 26
170781	M4-83-492	B-492	Polyester	Black on White	Matte	0.500 (12.7)	-	-	240	Fig 26
170777	M4C-500-492	B-492	Polyester	Black on White	Matte	0.500 (12.7)	25 ft (7.6 m)	-	1 roll (cont.)	Fig 33



Self-Laminating Cryogenic Polyester Labels

Securely label lab tubes and vials for cryogenic storage with this self-laminating ultra-thin polyester label material (B-461).




Figure 27

Figure 33

Part No.	Catalog #	B#	Material	Colour	Finish	Label width A inch (mm)	Label height B inch (mm)	Print-on area C inch (mm)	Labels per roll	Figure
170766	M4-124-461	B-461	Polyester	Black on White, Clear	Matte	1.650 (41.9)	0.500 (12.7)	0.750 (19.1)	180	Fig 27
170767	M4-72-461	B-461	Polyester	Black on White, Clear	Matte	1.750 (44.4)	0.500 (12.7)	0.750 (19.1)	180	Fig 27
170770	M4-86-461	B-461	Polyester	Black on White, Clear	Matte	2.625 (66.9)	0.600 (15.2)	1.000 (25.4)	120	Fig 27
170769	M4-126-461	B-461	Polyester	Black on White, Clear	Matte	1.800 (45.7)	0.600 (15.2)	1.000 (25.4)	180	Fig 27
170768	M4-74-461	B-461	Polyester	Black on White, Clear	Matte	2.200 (55.9)	0.500 (12.7)	0.750 (19.1)	140	Fig 27
170875	M4C-375-461	B-461	Polyester	Black on White	Matte	0.375 (9.5)	25 ft (7.6 m)	-	1 roll (cont.)	Fig 33
170765	M4C-500-461	B-461	Polyester	Black on White	Matte	0.500 (12.7)	25 ft (7.6 m)	-	1 roll (cont.)	Fig 33



Solvent Resistant Polyester Labels

Easily label lab slides and well plates with the B-488 high-performance polyester label material.




Figure 29

Part No.	Catalog #	B#	Material	Colour	Finish	Label width A inch (mm)	Label height B inch (mm)	Labels per roll	Figure
170774	M4-81-488	B-488	Polyester	Black on White	Matte	1.900 (48.3)	0.250 (6.4)	160	Fig 29

Metallised

Use professional metallic-looking labels for rating plates, name plates and general identification of industrial products.



Metallised Matte Gray Polyester Labels

Create tough serial and rating plate labels with the B-428 metallised polyester label material with flexible high-tack adhesive.




Figure 29




Figure 46

Part No.	Catalog #	B#	Material	Colour	Finish	Label width A inch (mm)	Label height B inch (mm)	Labels per roll	Figure
170762	M4-47-428	B-428	Polyester	Black on Light Gray	Matte	1.000 (25.4)	0.500 (12.7)	480	Fig 29
170763	M4-60-428	B-428	Polyester	Black on Light Gray	Matte	1.000 (25.4)	2.000 (50.8)	140	Fig 29
170764	M4-92-428-BB	B-428	Polyester	Black on Light Gray	Matte	0.500 (12.7)	1.130 (28.7)	239	Fig 46

Multi-Purpose

Rely on white or clear labels for just about any industrial application that involves high or low temperatures, harsh environments or regulatory specifications. Choose from various adhesion types: standard, aggressive adhesive, ultra-aggressive adhesive or repositionable.



Aggressive Adhesive Multi-Purpose Nylon Labels

Looking for a tough and versatile general-purpose label material? Look no further than the B-499 nylon cloth label material!




Figure 24




Figure 26




Figure 29




Figure 33




Figure 63

Part No.	Catalog #	B#	Material	Colour	Finish	Label width A inch (mm)	Label height B inch (mm)	Secondary label C inch (mm)	Labels per roll	Figure
170796	M4-11-499	B-499	Nylon	Black on White	Matte	0.750 (19.1)	0.500 (12.7)	-	220	Fig 29
177011	M4-22-499	B-499	Nylon	Black on White	Matte	3.000 (76.2)	1.000 (25.4)	-	100	Fig 29
170808	M4-128-499	B-499	Nylon	Black on White	Matte	1.900 (48.3)	1.000 (25.4)	-	100	Fig 29
170802	M4-130-499	B-499	Nylon	Black on White	Matte	0.375 (9.5)	0.825 (20.9)	-	220	Fig 29
170803	M4-131-499	B-499	Nylon	Black on White	Matte	0.500 (12.7)	1.000 (25.4)	-	180	Fig 29
170807	M4-141-499	B-499	Nylon	Black on White	Matte	1.000 (25.4)	1.000 (25.4)	-	90	Fig 63
170798	M4-82-499	B-499	Nylon	Black on White	Matte	0.375 (9.5)	-	-	240	Fig 26
170797	M4-82-499-OR-BK	B-499	Nylon	Black on Orange	Matte	0.375 (9.5)	-	-	240	Fig 26
170805	M4-82-499-RD-BK	B-499	Nylon	Black on Red	Matte	0.375 (9.5)	-	-	240	Fig 26
170800	M4-82-499-YL-BK	B-499	Nylon	Black on Yellow	Matte	0.375 (9.5)	-	-	240	Fig 26
170799	M4-83-499	B-499	Nylon	Black on White	Matte	0.500 (12.7)	-	-	240	Fig 26
170804	M4-83-499-OR-BK	B-499	Nylon	Black on Orange	Matte	0.500 (12.7)	-	-	240	Fig 26
170806	M4-83-499-RD-BK	B-499	Nylon	Black on Red	Matte	0.500 (12.7)	-	-	240	Fig 26
170801	M4-83-499-YL-BK	B-499	Nylon	Black on Yellow	Matte	0.500 (12.7)	-	-	240	Fig 26
170793	M4C-375-499	B-499	Nylon	Black on White	Matte	0.375 (9.5)	16 ft (4.9 m)	-	1 roll (cont.)	Fig 33
170794	M4C-500-499	B-499	Nylon	Black on White	Matte	0.500 (12.7)	16 ft (4.9 m)	-	1 roll (cont.)	Fig 33
170795	M4C-750-499	B-499	Nylon	Black on White	Matte	0.750 (19.1)	16 ft (4.9 m)	-	1 roll (cont.)	Fig 33



Harsh Environment Multi-Purpose Clear Polyester Labels

A permanent acrylic-based adhesive that withstands numerous solvents and can be applied to variable surfaces.

Service temp: -94° F to 212° F (-70° C to 100° C). UL, CSA recognised.





Figure 33

Part No.	Catalog #	B#	Material	Colour	Finish	Label width A inch (mm)	Label height B inch (mm)	Labels per roll	Figure
177006	M4C-1000-423	B-423	Polyester	Black on White	Gloss	1.000 (25.4)	25 (7.6)	1 roll (cont.)	Fig 33



Harsh Environment Multi-Purpose Polyester Labels

UL recognised for outdoor use on glass, thermoset polyester plastic and polyvinyl fluoride plastic.




Figure 33

Part No.	Catalog #	B#	Material	Colour	Finish	Label width A inch (mm)	Label height B inch (mm)	Labels per roll	Figure
177007	M4C-1000-430	B-430	Polyester	Black on Clear	Gloss	1.000 (25.4)	25 (7.6)	1 roll (cont.)	Fig 33



Repositionable Multi-Purpose Vinyl Labels

Indoor / outdoor vinyl is a high-gloss, durable, flexible material designed with special adhesive to easily remove and reapply.




Figure 33

Part No.	Catalog #	B#	Material	Colour	Finish	Label width A inch (mm)	Label height B inch (mm)	Labels per roll	Figure
177008	M4C-1000-581-WT	B-581	Vinyl	Black on White	Gloss	1.000 (25.4)	25 (7.6)	1 roll (cont.)	Fig 33



Aggressive Adhesive Multi-Purpose Polyester Labels

Easily label components with the thermal transfer, glossy permanent polyester label material (B-422).

Temp. range: -40° F to 212° F (-40° C to 100° C).
UL recognised




Figure 29




Figure 33

Part No.	Catalog #	B#	Material	Colour	Finish	Label width A inch (mm)	Label height B inch (mm)	Labels per roll	Figure
170738	M4-47-422	B-422	Polyester	Black on White	Gloss	1.000 (25.4)	0.500 (12.7)	480	Fig 29
170739	M4-49-422	B-422	Polyester	Black on White	Gloss	1.000 (25.4)	1.000 (25.4)	260	Fig 29
170735	M4-7-422	B-422	Polyester	Black on White	Gloss	0.500 (12.7)	0.500 (12.7)	280	Fig 29
170737	M4-89-422	B-422	Polyester	Black on White	Gloss	0.500 (12.7)	1.500 (38.1)	180	Fig 29
170736	M4-90-422	B-422	Polyester	Black on White	Gloss	1.500 (38.1)	0.750 (19.1)	180	Fig 29
170734	M4C-1000-422	B-422	Polyester	Black on White	Gloss	1.000 (25.4)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170730	M4C-375-422	B-422	Polyester	Black on White	Gloss	0.375 (9.5)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170731	M4C-475-422	B-422	Polyester	Black on White	Gloss	0.475 (12.1)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170732	M4C-500-422	B-422	Polyester	Black on White	Gloss	0.500 (12.7)	25 ft (7.6 m)	1 roll (cont.)	Fig 33
170733	M4C-625-422	B-422	Polyester	Black on White	Gloss	0.625 (15.9)	25 ft (7.6 m)	1 roll (cont.)	Fig 33



Repositionable Multi-Purpose Vinyl Cloth Labels

The adhesive and cloth backing offers excellent holding power, yet allows for clean removal and repositioning if necessary.

Temp. range -40° F to 175° F (-40° C to 70° C).
UL recognised.




Figure 29




Figure 33

Part No.	Catalog #	B#	Material	Colour	Finish	Approx Wire Gauge	Label width A inch (mm)	Label height B inch (mm)	Labels per roll	Figure
170785	M4-11-498	B-498	Vinyl	Black on White	Semi-gloss	16 AWG - 10 AWG	0.750 (19.1)	0.500 (12.7)	220	Fig 29
170788	M4-131-498	B-498	Vinyl	Black on White	Semi-gloss	10 AWG - 4 AWG	0.500 (12.7)	1.000 (25.4)	180	Fig 29
170790	M4-48-498	B-498	Vinyl	Black on White	Semi-gloss	10 AWG - 4 AWG	1.000 (25.4)	0.750 (19.1)	180	Fig 29
170791	M4-49-498	B-498	Vinyl	Black on White	Semi-gloss	10 AWG - 4 AWG	1.000 (25.4)	1.000 (25.4)	160	Fig 29
170787	M4-7-498	B-498	Vinyl	Black on White	Semi-gloss	22 AWG - 16 AWG	0.500 (12.7)	0.500 (12.7)	240	Fig 29
170789	M4-91-498	B-498	Vinyl	Black on White	Semi-gloss	10 AWG - 4 AWG	1.000 (25.4)	1.500 (38.1)	120	Fig 29
170792	M4-128-498	B-498	Vinyl	Black on White	Semi-gloss	10 AWG - 4 AWG	1.900 (48.3)	1.000 (25.4)	100	Fig 29
170782	M4C-240-498	B-498	Vinyl	Black on White	Semi-gloss	-	0.240 (6.1)	16 ft (4.9 m)	1 roll (cont.)	Fig 33
170783	M4C-318-498	B-498	Vinyl	Black on White	Semi-gloss	-	0.318 (8.1)	16 ft (4.9 m)	1 roll (cont.)	Fig 33
170784	M4C-375-498	B-498	Vinyl	Black on White	Semi-gloss	-	0.375 (9.5)	20 ft (6.1 m)	1 roll (cont.)	Fig 33



Ultra-Aggressive Adhesive Multi-Purpose Polyester Labels

Rough, glossy and irregular surfaces are no match for the ToughBond® ultra-aggressive polyester label material (B-483).




Figure 29

Part No.	Catalog #	B#	Material	Colour	Finish	Label Width A inch (mm)	Label Height B inch (mm)	Labels per Roll	Figure
170773	M4-47-483	B-483	Polyester	Black on White	Gloss	1.000 (25.4)	0.500 (12.7)	480	Fig 29
170772	M4-60-483	B-483	Polyester	Black on White	Gloss	1.000 (25.4)	2.000 (50.8)	140	Fig 29
170771	M4-61-483	B-483	Polyester	Black on White	Gloss	0.500 (12.7)	2.000 (50.8)	80	Fig 29

Paper

Use low cost, smear-resistant paper labels for identifying just about anything in labs or industrial settings.



Water Dissolvable Paper Labels

Use this water dissolvable label material (B-403) for applications that require easily removable adhesive labels.




Figure 33

Part No.	Catalog #	B#	Material	Colour	Finish	Label width A inch (mm)	Roll length B feet (m)	Labels per roll	Figure
170723	M4C-750-403	B-403	Paper	Black on White	Matte	0.750 (19.1)	25 (7.6)	1 roll (cont.)	Fig 33

Tags and inserts

Get added durability from tags that are engineered for extreme temperatures and abrasion. Use them to wrap wire or cable bundles in patch panels and outlets.



High Tensile Polypropylene Inserts/Tags

Mark outlet faceplates and patch panels with the B-412 high tensile strength polypropylene insert stock material.




Figure 33

Part No.	Catalog #	B#	Material	Colour	Finish	Label width A inch (mm)	Roll length B feet (m)	Labels per roll	Figure
170725	M4C-375-412	B-412	Polypropylene	Black on White	Matte	0.375 (9.5)	20 (6.1)	1 roll (cont.)	Fig 33
170724	M4C-475-412	B-412	Polypropylene	Black on White	Matte	0.475 (12.1)	20 (6.1)	1 roll (cont.)	Fig 33
170726	M4C-625-412	B-412	Polypropylene	Black on White	Matte	0.625 (15.9)	20 (6.1)	1 roll (cont.)	Fig 33

Unique Material

Get a grip on your wire and cable identification – Brady and VELCRO® Brand have partnered to bring you BradyGrip® Print-on Hook Material, an exclusive print-and-place material that can be easily applied, repositioned or removed.



BradyGrip® Print-on-Hook Labels featuring VELCRO® Brand Hook

Easily place, remove and reposition labels on cable bundles with the BradyGrip® Print-on Hook label material (B-414), paired with VELCRO® Brand ONE-WRAP® Rolls.




Figure 33

Part No.	Catalog #	B#	Material	Colour	Finish	Label width A inch (mm)	Label height B inch (mm)	Labels per roll	Figure
170727	M4C-250-414	B-414	Polyester	Black on White	Matte	0.250 (6.4)	12 (3.7)	1 roll (cont.)	Fig 33
170728	M4C-500-414	B-414	Polyester	Black on White	Matte	0.500 (12.7)	12 (3.7)	1 roll (cont.)	Fig 33
170729	M4C-750-414	B-414	Polyester	Black on White	Matte	0.750 (19.1)	12 (3.7)	1 roll (cont.)	Fig 33

Wrap Around

Protect important wire and cable ID using labels with a clear laminating barrier. The clear vinyl resists abrasions and chemicals while keeping the white printable area intact.



Aggressive Adhesive Self-Laminating Vinyl Wrap Around Labels

B-417 High-Adhesion Self-Laminating Vinyl Wraps are for tough conditions, including high-humidity environments, small diameter wires and newer wire jacketing materials.




Figure 42

Part No.	Catalog #	B#	Material	Colour	Finish	Approx Wire Gauge	Label width A inch (mm)	Label height B inch (mm)	Print-on area C inch (mm)	Labels per roll	Figure
170959	M4-11-417	B-417	Vinyl	Black on White, Clear	Matte	20 AWG - 10 AWG	0.500 (12.7)	0.750 (19.1)	0.375 (9.5)	360	Fig 42
170961	M4-136-417	B-417	Vinyl	Black on White, Clear	Matte	20 AWG - 12 AWG	1.000 (25.4)	0.750 (19.1)	0.375 (9.5)	340	Fig 42
170960	M4-143-417	B-417	Vinyl	Black on White, Clear	Matte	12 AWG - 6 AWG	1.000 (25.4)	1.250 (31.8)	0.500 (12.7)	200	Fig 42
170963	M4-48-417	B-417	Vinyl	Black on White, Clear	Matte	20 AWG - 12 AWG	0.750 (19.1)	1.000 (25.4)	0.375 (9.5)	200	Fig 42
170962	M4-49-417	B-417	Vinyl	Black on White, Clear	Matte	16 AWG - 8 AWG	1.000 (25.4)	1.000 (25.4)	0.375 (9.5)	260	Fig 42
170958	M4-51-417	B-417	Vinyl	Black on White, Clear	Matte	6 AWG - 000 AWG	1.000 (25.4)	2.500 (63.5)	0.750 (19.1)	110	Fig 42
170957	M4-91-417	B-417	Vinyl	Black on White, Clear	Matte	10 AWG - 4 AWG	1.000 (25.4)	1.500 (38.1)	0.500 (12.7)	180	Fig 42

Wrap Around Continued



Self-Laminating Vinyl Wrap Around Labels

Mark cables and wires with the B-427 self-laminating vinyl label material, designed with a clear self-laminating protective layer.

Temp. range: -40° F to 158° F (-40° C to 70° C), UL recognised.




Figure 29




Figure 42



Figure 42a




Figure 85e

Part No.	Catalog #	B#	Material	Colour	Finish	Approx Wire Gauge	Label width A inch (mm)	Label height B inch (mm)	Print-on area C inch (mm)	Labels per roll	Figure
170741	M4-102-427	B-427	Vinyl	Black on White, Clear	Matte	10 AWG - 4 AWG	0.500 (12.7)	1.250 (31.8)	0.375 (9.5)	200	Fig 42
170742	M4-11-427	B-427	Vinyl	Black on White, Clear	Matte	20 AWG - 10 AWG	0.500 (12.7)	0.750 (19.1)	0.375 (9.5)	360	Fig 42
170748	M4-135-427-AW	B-427	Vinyl	Black on White	Matte	-	0.250 (6.4)	1.100 (27.9)	-	240	Fig 29
170751	M4-136-427	B-427	Vinyl	Black on White, Clear	Matte	20 AWG - 8 AWG	1.000 (25.4)	0.750 (19.1)	0.375 (9.5)	340	Fig 42
170744	M4-143-427	B-427	Vinyl	Black on White, Clear	Matte	10 AWG - 6 AWG	1.000 (25.4)	1.250 (31.8)	0.500 (12.7)	200	Fig 42
170758	M4-203-RO-427	B-427	Vinyl	Black on White, Clear	Matte	16 AWG - 8 AWG	1.000 (25.4)	1.750 (44.5)	0.700 (17.8)	110	Fig 85e
170757	M4-206-RO-427	B-427	Vinyl	Black on White, Clear	Matte	16 AWG - 8 AWG	0.500 (12.7)	1.750 (44.5)	0.700 (17.8)	110	Fig 85e
170760	M4-207-RO-427	B-427	Vinyl	Black on White, Clear	Matte	10 AWG - 3 AWG	0.500 (12.7)	2.750 (69.9)	1.100 (27.9)	70	Fig 85e
170761	M4-209-RO-427	B-427	Vinyl	Black on White, Clear	Matte	10 AWG - 3 AWG	1.000 (25.4)	2.750 (69.9)	1.100 (27.9)	70	Fig 85e
170759	M4-211-RO-427	B-427	Vinyl	Black on White, Clear	Matte	20 AWG - 10 AWG	1.000 (25.4)	1.200 (30.5)	0.500 (12.7)	150	Fig 85e
170755	M4-47-427	B-427	Vinyl	Black on White, Clear	Matte	16 AWG - 8 AWG	0.500 (12.7)	1.000 (25.4)	0.375 (9.5)	360	Fig 42
170752	M4-48-427	B-427	Vinyl	Black on White, Clear	Matte	20 AWG - 8 AWG	0.750 (19.1)	1.000 (25.4)	0.375 (9.53)	200	Fig 42
170750	M4-49-427	B-427	Vinyl	Black on White, Clear	Matte	16 AWG - 8 AWG	1.000 (25.4)	1.000 (25.4)	0.375 (9.53)	260	Fig 42
170749	M4-51-427	B-427	Vinyl	Black on White, Clear	Matte	16 AWG - 10 AWG	1.000 (25.4)	2.500 (63.5)	0.750 (19.1)	110	Fig 42
170753	M4-51-427-YL	B-427	Vinyl	Black on Yellow, Clear	Matte	16 AWG - 10 AWG	1.000 (25.4)	2.500 (63.5)	0.750 (19.1)	180	Fig 42
170754	M4-53-427	B-427	Vinyl	Black on White, Clear	Matte	12 AWG - 10 AWG	1.000 (25.4)	4.000 (101.6)	1.000 (25.4)	70	Fig 42
170756	M4-53-427-YL	B-427	Vinyl	Black on Yellow, Clear	Matte	12 AWG - 10 AWG	1.000 (25.4)	4.000 (101.6)	1.000 (25.4)	70	Fig 42
170747	M4-89-427	B-427	Vinyl	Black on White, Clear	Matte	10 AWG - 4 AWG	0.500 (12.7)	1.500 (38.1)	0.500 (12.7)	180	Fig 42
170745	M4-90-427	B-427	Vinyl	Black on White, Clear	Matte	10 AWG - 4 AWG	0.750 (19.1)	1.500 (38.1)	0.500 (12.7)	180	Fig 42
170743	M4-91-427	B-427	Vinyl	Black on White, Clear	Matte	10 AWG - 4 AWG	1.000 (25.4)	1.500 (38.1)	0.500 (12.7)	180	Fig 42
170746	M4-91-427-YL	B-427	Vinyl	Black on Yellow, Clear	Matte	10 AWG - 4 AWG	1.000 (25.4)	1.500 (38.1)	0.500 (12.7)	180	Fig 42

M410 Printer Specifications

Printer:	
Printer Name	M410 Printer
Print Resolution	Thermal transfer, 300 dpi
Print Speed	1.33 in. / sec. (33.78mm/sec)
Keyboard Type	QWERTY Keyboard
Dimensions in. (mm)	11.50 in. H x 6.0 in. W x 3.5 in. D (292.10mm x 152.40mm x 88.90mm)
Weight	2.6 lbs (1.18kg)
Warranty	2 years
Overmold/Rugged	Yes, base
Operating Temp	40° F to 110° F (4° C to 43° C)
Humidity	10%-90% (non-condensing)
Storage Temp	0 ° F to 110° F (-18° C to 43° C)
Continuous or Die Cut Labels	Continuous and die cut
Portability	Portable
Features	
Memory	48 MB (stores up to 25,000 labels)
Cutter Type	Manual
Cut Options	Cut between labels or at end of print job
Label Retention After Cut	Yes
Labels Per Day (Average)	250
Battery Life Indicator	Visible on LCD screen
Label Odometer (Supply Remaining)	Visible on LCD screen
Error Messaging	Visible on LCD screen
Attachable Accessories	Magnet, Utility Hook
Drop Test & Durability	Resistant to 4 ft (1.2m) drops
Languages	24: Bulgarian, Chinese (Traditional), Chinese (Simplified), Croatian, Czech, Danish, Dutch, English, Estonian, Finnish, French, German, Italian, Japanese, Norwegian, Polish, Portuguese, Romanian, Russian, Slovak, Slovenian, Spanish, Swedish, Turkish
Power	
Power Supply	AC Adapter, Rechargeable Battery, USB
Battery Included	Yes, removable
Battery Life (average)	250 labels
Rechargeable Battery	Yes, rechargeable NiMH battery
Re-Charge Time (estimated)	4 hours
Charging Options	AC Adapter, Quick Charger Accessory, USB
Power Source Voltage	110 - 240 V
Auto Shut Off	Yes, user configurable

Communication and interface	
PC Connectivity	USB Cable
Import Data	Yes
Software Compatibility	Brady Workstation
Media	
Type	Media and ribbon in cartridge, supplied together
Load Labels Location	Front door
Label Output Location	Side
Compatible Media	M4, M4C
Memory in Cartridge	Yes
Maximum Print Width	1.00 in (25.40mm)
Maximum Print Length	39 in (99.06mm)
Maximum Liner Width	1.31 in (33.27mm)
Media Widths	Various sizes from 0.24 to 1.00 in. (6.10 to 25.40 mm)
Minimum Media Width	0.81 in. (20.65mm)
Minimum Label Height	0.236 in (5.99mm)
Included Media	M4C-1000-595-WT-BK
Number of Stock Parts	110+
Colour Print Capability	Single print colour on a label
Available Media Colours	Black on Blue, Black on Clear, Black on Gray, Black on Green, Black on Orange, Black on Red, Black on White, Black on Yellow, Red on White, White on Black, White on Blue, White on Clear, White on Green, White on Red
Ribbons	Supplied with media in cartridge
Cartridge Width Detection	Yes, from printer
Cartridge Setting Detection	Yes, from printer
Custom Labels Available	No
Compliance	
Agency Approvals	FCC Part 15 Class A
Trade	Country of origin, Malaysia (printer), ECCN: EAR99
MSDS	For MSDS visit www.BradyID.com.au
Fonts, graphics, symbols	
Font	Brady Alpine, Brady Fixed Width
Text Sizes	4-103pt
Number of Symbols	480
Special Characters	123
Symbols	Yes, determined by software

M410 Printer & Accessories

Catalog #	Description
881535	M410 Label Printer Includes: (1) Printer, (1) AC adapter, (1) USB cord, (1) 1" (25.4mm) wide All-Weather label cartridge, (1) NiMH battery, (1) USB flash drive with a driver, Brady Workstation Basic Design Suite Software
881536	M410 Label Printer with Brady Workstation Product & Wire ID Software Includes: All components that come with the M410 printer, Brady Workstation Product and Wire Identification Suite Software
881537	M410 Label Printer with Brady Workstation Safety & Facility ID Software Includes: All components that come with the M410 printer, Brady Workstation Safety and Facility Identification Suite Software

Accessories		
	176995	M410 Hard Case
	874060	AC Adapter
	876185	Quick Charger
	133255	Battery
	176991	Magnet
	176992	Utility Hook





We make products that make the world a safer and smarter place. From the depths of the ocean to outer space, from the factory floor to the delivery room — **we're just about everywhere you look.**

- ▶ For more information or to learn more about our innovative products, visit BradyID.com.au or call 1800 620 816.

Australia | BradyID.com.au

Customer Service: 1800 620 8166